

Microsoft~70-515~www.logicsmeet.com

Number: 70-515
Passing Score: 700
Time Limit: 180 min
File Version: 1.0

Welcome to www.logicsmeet.com

This website is for developers and professionals who seek technical solutions. We provide users the ability to raise any questions related to technical in any technology and general quires. Users can share their solutions related to technical questions raised In the technical forum and help others to solve their technical issues.

We also help users to practice their certifications and pass the exams by providing dumps. We strongly recommend that not to strict on the dumps provided in our website. To gain knowledge user can prepare for the respective exam Training Kit provided by the company. E.g. Microsoft provides exam Training Kit for their respective certification exams.

To know more visit us @ www.logicsmeet.com

Exam A

QUESTION 1

You are implementing an ASP.NET application that uses data-bound GridView controls in multiple pages. You add JavaScript code to periodically update specific types of data items in these GridView controls. You need to ensure that the JavaScript code can locate the HTML elements created for each row in these GridView controls, without needing to be changed if the controls are moved from one page to another. What should you do?

- A. Replace the GridView control with a ListView control.
- B. Set the ClientIDMode attribute to Predictable in the web.config file.
- C. Set the ClientIDRowSuffix attribute of each unique GridView control to a different value.
- D. Set the @ OutputCache directive's VaryByControl attribute to the ID of the GridView control.

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 2

You are implementing an ASP.NET application that includes a page named TestPage.aspx. TestPage.aspx uses a master page named TestMaster.master. You add the following code to the TestPage.aspx code-behind file to read a TestMaster.master public property named CityName.

```
protected void Page_Load(object sender, EventArgs e)
```

```
{ string s = Master.CityName;.
```

```
} You need to ensure that TestPage.aspx can access the CityName property. What should you do?
```

- A. Add the following directive to TestPage.aspx.
`<%@ MasterType VirtualPath="~/TestMaster.master" %>`
- B. Add the following directive to TestPage.aspx.
`<%@ PreviousPageType VirtualPath="~/TestMaster.master" %>`
- C. Set the Strict attribute in the @ Master directive of the TestMaster.master page to true.
- D. Set the Explicit attribute in the @ Master directive of the TestMaster.master page to true.

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 3

You are implementing an ASP.NET page. You add asp:Button controls for Help and for Detail. You add an ASP.NET skin file named default.skin to a theme. You need to create and use a separate style for the Help button, and you must use the default style for the Detail button. What should you do?

- A. Add the following markup to the default.skin file.
`<asp:Button ID="Help"></asp:Button>`
`<asp:Button ID="Default"></asp:Button>`
Use the following markup for the buttons in the ASP.NET page.
`<asp:Button SkinID="Help">Help</asp:Button>`
`<asp:Button SkinID="Default">Detail</asp:Button>`

- B. Add the following markup to the default.skin file.
`<asp:Button SkinID="Help"></asp:Button>`
`<asp:Button ID="Default"></asp:Button>`
 Use the following markup for the buttons in the ASP.NET page.
`<asp:Button SkinID="Help">Help</asp:Button>`
`<asp:Button SkinID="Default">Detail</asp:Button>`
- C. Add the following code segment to default.skin.
`<asp:Button SkinID="Help"></asp:Button>`
`<asp:Button></asp:Button>`
 Use the following markup for the buttons in the ASP.NET page.
`<asp:Button SkinID="Help"></asp:Button>`
`<asp:Button SkinID="Default">Detail</asp:Button>`
- D. Add the following markup to default.skin.
`<asp:Button SkinID="Help"></asp:Button>`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 4

You are creating an ASP.NET Web site. The site has a master page named Custom.master. The code-behind file for Custom.master contains the following code segment. public partial class CustomMaster : MasterPage {
 public string Region

```
{
get; set;
}
protected void Page_Load(object sender, EventArgs e)
{
}
}
```

You create a new ASP.NET page and specify Custom.master as its master page.

You add a Label control named lblRegion to the new page.

You need to display the value of the master page's Region property in lblRegion.

What should you do?

- A. Add the following code segment to the Page_Load method of the page code-behind file.
 CustomMaster custom = this.Parent as CustomMaster;
 lblRegion.Text = custom.Region;
- B. Add the following code segment to the Page_Load method of the page code-behind file.
 CustomMaster custom = this.Master as CustomMaster;
 lblRegion.Text = custom.Region;
- C. Add the following code segment to the Page_Load method of the Custom.Master.cs code-behind file.
 Label lblRegion = Page.FindControl("lblRegion") as Label; lblRegion.Text = this.Region;
- D. Add the following code segment to the Page_Load method of the Custom.Master.cs code-behind file.
 Label lblRegion = Master.FindControl("lblRegion") as Label; lblRegion.Text = this.Region;

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 5

You are implementing an ASP.NET Web site. The site allows users to explicitly choose the display language for the site's Web pages. You create a Web page that contains a DropDownList named ddlLanguage, as shown in the following code segment.

```
<asp:DropDownList ID="ddlLanguage" runat="server"
AutoPostBack="True" ClientIDMode="Static"
OnSelectedIndexChanged="SelectedLanguageChanged">
<asp:ListItem Value="en">English</asp:ListItem>
<asp:ListItem Value="es">Spanish</asp:ListItem>
<asp:ListItem Value="fr">French</asp:ListItem>
<asp:ListItem Value="de">German</asp:ListItem>
</asp:DropDownList>
```

The site contains localized resources for all page content that must be translated into the language that is selected by the user.

You need to add code to ensure that the page displays content in the selected language if the user selects a language in the drop-down list.

Which code segment should you use?

- A.

```
protected void SelectedLanguageChanged(object sender, EventArgs e) {
    Page.UICulture = ddlLanguage.SelectedValue;
}
```
- B.

```
protected override void InitializeCulture()
{
    Page.UICulture = Request.Form["ddlLanguage"];
}
```
- C.

```
protected void Page_Load(object sender, EventArgs e)
{
    Page.Culture = Request.Form["ddlLanguage"];
}
```
- D.

```
protected override void InitializeCulture()
{
    Page.Culture = ddlLanguage.SelectedValue;
}
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 6

You are implementing an ASP.NET application that includes the following requirements. Retrieve the number of active bugs from the cache, if the number is present. If the number is not found in the cache, call a method named GetActiveBugs, and save the result under the ActiveBugs cache key. Ensure that cached data expires after 30 seconds. You need to add code to fulfill the requirements. Which code segment should you add?

- A.

```
int numOfActiveBugs = (int)Cache["ActiveBugs"];
if (!numOfActiveBugs.HasValue)
{
    int result = GetActiveBugs();
    Cache.Insert("ActiveBugs", result, null,
        DateTime.Now.AddSeconds(30), Cache.NoSlidingExpiration);
    numOfActiveBugs = result;
}
ActiveBugs = numOfActiveBugs.Value;
```
- B.

```
int numOfActiveBugs = (int) Cache.Get("ActiveBugs");
if (numOfActiveBugs != 0)
{
    int result = GetActiveBugs();
    Cache.Insert("ActiveBugs", result, null,
        DateTime.Now.AddSeconds(30), Cache.NoSlidingExpiration);
    numOfActiveBugs = result;
}
ActiveBugs = numOfActiveBugs;
```
- C.

```
int numOfActiveBugs = 0;
if (Cache["ActiveBugs"] == null)
{
    int result = GetActiveBugs();
    Cache.Add("ActiveBugs", result, null, DateTime.Now.AddSeconds(30), Cache.NoSlidingExpiration,
        CacheItemPriority.Normal, null); Cache.NoSlidingExpiration, CacheItemPriority.Normal, null);
    numOfActiveBugs = result;
}
ActiveBugs = numOfActiveBugs;
```
- D.

```
int numOfActiveBugs = (int?)Cache["ActiveBugs"];
if (!numOfActiveBugs.HasValue)
{
    int result = GetActiveBugs();
    Cache.Insert("ActiveBugs", result, null,
        Cache.NoAbsoluteExpiration, TimeSpan.FromSeconds(30));
    numOfActiveBugs = result;
}
ActiveBugs = numOfActiveBugs.Value;
```

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 7

You are implementing a method in an ASP.NET application that includes the following requirements. Store the number of active bugs in the cache. The value should remain in the cache when there are calls more often than every 15 seconds. The value should be removed from the cache after 60 seconds. You need to add code to meet the requirements. Which code segment should you add?

- A.

```
Cache.Insert("ActiveBugs", result, null,
    DateTime.Now.AddSeconds(60), TimeSpan.FromSeconds(15));
```

- B. `Cache.Insert("Trigger", DateTime.Now, null, DateTime.Now.AddSeconds(60), Cache.NoSlidingExpiration);`
`CacheDependency cd = new CacheDependency(null, new string[] { "Trigger" });`
`Cache.Insert("ActiveBugs", result, cd, Cache.NoAbsoluteExpiration, TimeSpan.FromSeconds(15));`
- C. `Cache.Insert("ActiveBugs", result, null, Cache.NoAbsoluteExpiration, TimeSpan.FromSeconds(15));`
`CacheDependency cd = new CacheDependency(null, new string[] { "ActiveBugs" });`
`Cache.Insert("Trigger", DateTime.Now, cd, DateTime.Now.AddSeconds(60), Cache.NoSlidingExpiration);`
- D. `CacheDependency cd = new CacheDependency(null, new string[] { "Trigger" });`
`Cache.Insert("Trigger", DateTime.Now, null, DateTime.Now.AddSeconds(60), Cache.NoSlidingExpiration);`
`Cache.Insert("ActiveBugs", result, cd, Cache.NoAbsoluteExpiration, TimeSpan.FromSeconds(15));`
NV0XE-Y7GZZ

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 8

You are implementing an ASP.NET application that will use session state in out-of-proc mode. You add the following code. `public class Person`

```
{
public string FirstName { get; set;}
public string LastName { get; set;}
}
```

You need to add an attribute to the `Person` class to ensure that you can save an instance to session state. Which attribute should you use?

- A. `Bindable`
- B. `DataObject`
- C. `Serializable`
- D. `DataContract`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 9

You create a Web page named `TestPage.aspx` and a user control named contained in a file named `TestUserControl.ascx`.

You need to dynamically add `TestUserControl.ascx` to `TestPage.aspx`.

Which code segment should you use?

- A. `protected void Page_Load(object sender, EventArgs e)`

```
{
Control userControl = Page.LoadControl("TestUserControl.ascx"); Page.Form.Controls.Add(userControl);
}
```

- B. `protected void Page_Load(object sender, EventArgs e)`
`{`
`Control userControl = Page.FindControl("TestUserControl.ascx"); Page.Form.Controls.Load(userControl);`
`}`
- C. `protected void Page_PreInit(object sender, EventArgs e)`
`{`
`Control userControl = Page.LoadControl("TestUserControl.ascx"); Page.Form.Controls.Add(userControl);`
`}`
- D. `protected void Page_PreInit(object sender, EventArgs e)`
`{`
`Control userControl = Page.FindControl("TestUserControl.ascx"); Page.Form.Controls.Load(userControl);`
`}`

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 10

You create a Web page named TestPage.aspx and a user control named TestUserControl.ascx. TestPage.aspx uses TestUserControl.ascx as shown in the following line of code.

```
<uc:TestUserControl ID="testControl" runat="server"/>
```

On TestUserControl.ascx, you need to add a read-only member named CityName to return the value "New York". You also must add code to TestPage.aspx to read this value. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add the following line of code to the TestUserControl.ascx.cs code-behind file.
`public string CityName`
`{`
`get { return "New York"; }`
`}`
- B. Add the following line of code to the TestUserControl.ascx.cs code-behind file.
`protected readonly string CityName = "New York";`
- C. Add the following code segment to the TestPage.aspx.cs code-behind file.
`protected void Page_Load(object sender, EventArgs e)`
`{`
`string s = testControl.CityName;`
`}`
- D. Add the following code segment to the TestPage.aspx.cs code-behind file.
`protected void Page_Load(object sender, EventArgs e)`
`{`
`string s = testControl.Attributes["CityName"];`
`}`

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 11

You use the following declaration to add a Web user control named TestUserControl.ascx to an ASP.NET

page named TestPage.aspx.

```
<uc:TestUserControl ID="testControl" runat="server"/>
```

You add the following code to the code-behind file of TestPage.aspx.

```
private void TestMethod()  
{  
    ...  
}
```

You define the following delegate.

```
public delegate void MyEventHandler();
```

You need to add an event of type MyEventHandler named MyEvent to TestUserControl.ascx and attach the page's TestMethod method to the event.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add the following line of code to TestUserControl.ascx.cs.
public event MyEventHandler MyEvent;
- B. Add the following line of code to TestUserControl.ascx.cs.
public MyEventHandler MyEvent;
- C. Replace the TestUserControl.ascx reference in TestPage.aspx with the following declaration.
<uc:TestUserControl ID="testControl" runat="server"
OnMyEvent="TestMethod"/>
- D. Replace the TestUserControl.ascx reference in TestPage.aspx with the following declaration.
<uc:TestUserControl ID="testControl" runat="server"
MyEvent="TestMethod"/>

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 12

You create a custom server control named Task that contains the following code segment. (Line numbers are included for reference only.)

```
01 namespace DevControls  
02 {  
03     public class Task : WebControl  
04     {  
05         [DefaultValue("")]  
06         public string Title { ... }  
07     }  
08     protected override void RenderContents(  
09         HtmlTextWriter output)  
10     {  
11         output.Write(Title);  
12     }  
13 }
```

You need to ensure that adding a Task control from the Toolbox creates markup in the following format.

```
<Dev:Task ID="Task1" runat="server" Title="New Task" />
```

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add the following code segment to the project's AssemblyInfo.cs file.
[assembly: TagPrefix("DevControls", "Dev")]
- B. Replace line 05 with the following code segment.
[DefaultValue("New Task")]

- C. Insert the following code segment immediately before line 03.
`[ToolboxData("<{0}:Task runat=\"server\" Title=\"New Task\" />\")]`
- D. Replace line 10 with the following code segment.
`output.Write("<Dev:Task runat=\"server\" Title=\"New Task\" />\");`

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 13

You are implementing an ASP.NET page that includes the following down list.

```
<asp:PlaceHolder ID="dynamicControls" runat="server">
<asp:DropDownList ID="MyDropDown" runat="server">
<asp:ListItem Text="abc" value="abc" />
<asp:ListItem Text="def" value="def" />
</asp:DropDownList>
</asp:PlaceHolder>
```

You need to dynamically add values to the end of the drop-down list.

What should you do?

- A. Add the following OnPreRender event handler to the asp:DropDownList protected void MyDropDown_PreRender(object sender, EventArgs e) {
`DropDownList ddl = sender as DropDownList;`
`Label lbl = new Label();`
`lbl.Text = "Option";`
`lbl.ID = "Option";`
`ddl.Controls.Add(lbl);`
`}`
- B. Add the following OnPreRender event handler to the asp:DropDownList protected void MyDropDown_PreRender(object sender, EventArgs e)
`{`
`DropDownList ddl = sender as DropDownList;`
`ddl.Items.Add("Option");`
`}`
- C. Add the following event handler to the page code-behind.
`protected void Page_LoadComplete(object sender, EventArgs e) {`
`DropDownList ddl = Page.FindControl("MyDropDown") as DropDownList; Label lbl = new Label();`
`lbl.Text = "Option";`
`lbl.ID = "Option";`
`ddl.Controls.Add(lbl);`
`}`
- D. Add the following event handler to the page code-behind.
`protected void Page_LoadComplete(object sender, EventArgs e) {`
`DropDownList ddl = Page.FindControl("MyDropDown") as DropDownList; ddl.Items.Add("Option");`
`}`

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 14

You create an ASP.NET page that contains the following tag.

```
<h1 id="hdr1" runat="server">Page Name</h1>
```

You need to write code that will change the contents of the tag dynamically when the page is loaded. What are two possible ways to achieve this goal? (Each correct answer presents a complete solution. Choose two.)

- A. `this.hdr1.InnerHtml = "Text";`
- B. `(hdr1.Parent as HtmlGenericControl).InnerText = "Text";`
- C. `HtmlGenericControl h1 =
this.FindControl("hdr1") as HtmlGenericControl;
h1.InnerText = "Text";`
- D. `HtmlGenericControl h1 =
Parent.FindControl("hdr1") as HtmlGenericControl;
h1.InnerText = "Text";`

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 15

You are implementing custom ASP.NET server controls.

You have a base class named `RotaryGaugeControl` and two subclasses named `CompassGaugeControl` and `SpeedGaugeControl`.

Each control requires its own client JavaScript code in order to function properly. The JavaScript includes functions that are used to create the proper HTML elements for the control. You need to ensure that the JavaScript for each of these controls that is used in an ASP.NET page is included in the generated HTML page only once, even if the ASP.NET page uses multiple instances of the given control.

What should you do?

- A. Place the JavaScript in a file named `controls.js` and add the following code line to the `Page_Load` method of each control.
`Page.ClientScript.RegisterClientScriptInclude(
this.GetType(), "script", "controls.js");`
- B. Add the following code line to the `Page_Load` method of each control, where `strJavascript` contains the JavaScript code for the control.
`Page.ClientScript.RegisterClientScriptBlock(
this.GetType(), "script", strJavascript);`
- C. Add the following code line to the `Page_Load` method of each control, where `CLASSNAME` is the name of the control class and `strJavascript` contains the JavaScript code for the control.
`Page.ClientScript.RegisterStartupScript(
typeof(CLASSNAME), "script", strJavascript);`
- D. Add the following code line to the `Page_Load` method of each control, where `CLASSNAME` is the name of the control class and `strJavascript` contains the JavaScript code for the control.
`Page.ClientScript.RegisterClientScriptBlock(
typeof(CLASSNAME), "script", strJavascript);`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 16

You are creating an ASP.NET Web site. The site is configured to use Membership and Role management providers.

You need to check whether the currently logged-on user is a member of a role named Administrators.

Which code segment should you use?

- A. `bool isMember = Roles.GetUsersInRole("Administrators").Any();`
- B. `bool isMember = Membership.ValidateUser(User.Identity.Name, "Administrators");`
- C. `bool isMember = Roles.GetRolesForUser("Administrators").Any();`
- D. `bool isMember = User.IsInRole("Administrators");`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 17

You are creating an ASP.NET Web site. You create a HTTP module named CustomModule, and you register the module in the web.config file.

The CustomModule class contains the following code.

```
public class CustomModule : IHttpModule
{
    string footerContent = "<div>Footer Content</div>";
    public void Dispose() {}
}
```

You need to add code to CustomModule to append the footer content to each processed ASP.NET page.

Which code segment should you use?

- A.

```
public CustomModule(HttpApplication app)
{
    app.EndRequest += new EventHandler(app_EndRequest);
    void app_EndRequest(object sender, EventArgs e)
    {
        HttpApplication app = sender as HttpApplication;
        app.Response.Write(footerContent);
    }
}
```
- B.

```
public void Init(HttpApplication app)
{
    app.EndRequest += new EventHandler(app_EndRequest);
    void app_EndRequest(object sender, EventArgs e)
    {
        HttpApplication app = new HttpApplication();
        app.Response.Write(footerContent);
    }
}
```

- C. `Public customModule();`
`{`
`HttpApplication app = new HttpApplication();`
`app.EndRequest += new EventHandler(app_EndRequest);`
`}`
`void app_EndRequest(object sender, EventArgs e)`
`{`
`HttpApplication app = sender as HttpApplication;`
`app.Response.Write(footerContent);`
`}`
- D. `public void Init(HttpApplication app)`
`{`
`app.EndRequest += new EventHandler(app_EndRequest);`
`}`
`void app_EndRequest(object sender, EventArgs e)`
`{`
`HttpApplication app = sender as HttpApplication;`
`app.Response.Write(footerContent);`
`}`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 18

You are implementing an ASP.NET Web site. The root directory of the site contains a page named Error.aspx. You need to display the Error.aspx page if an unhandled error occurs on any page within the site. You also must ensure that the original URL in the browser is not changed. What should you do?

- A. Add the following configuration to the web.config file.
`<system.web>`
`<customErrors mode="On">`
`<error statusCode="500" redirect="~/Error.aspx" />`
`</customErrors>`
`</system.web>`
- B. Add the following configuration to the web.config file.
`<system.web>`
`<customErrors redirectMode="ResponseRewrite"`
`mode="On" defaultRedirect="~/Error.aspx" />`
`</system.web>`
- C. Add the following code segment to the Global.asax file.
`void Application_Error(object sender, EventArgs e)`
`{`
`Response.Redirect("~/Error.aspx");`
`}`
- D. Add the following code segment to the Global.asax file.
`void Page_Error(object sender, EventArgs e)`
`Server.Transfer("~/Error.aspx");`
`}`

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 19

You are implementing an ASP.NET Web site. The site uses a component that must be dynamically configured before it can be used within site pages.

You create a static method named SiteHelper.Configure that configures the component. You need to add a code segment to the Global.asax file that invokes the SiteHelper.Configure method the first time, and only the first time, that any page in the site is requested.

Which code segment should you use?

- A.

```
void Application_Start(object sender, EventArgs e)
{
    SiteHelper.Configure();
}
```
- B.

```
void Application_Init(object sender, EventArgs e)
{
    SiteHelper.Configure();
}
```
- C.

```
void Application_BeginRequest(object sender, EventArgs e) {
    SiteHelper.Configure();
}
```
- D.

```
Object lockObject = new Object();
void Application_BeginRequest(object sender, EventArgs e) {
    lock(lockObject)
    {
        SiteHelper.Configure();
    }
}
```

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 20

You create a Visual Studio 2010 solution that includes a WCF service project and an ASP.NET project. The service includes a method named GetPeople that takes no arguments and returns an array of Person objects. The ASP.NET application uses a proxy class to access the service. You use the Add Service Reference wizard to generate the class.

After you create the proxy, you move the service endpoint to a different port. You need to configure the client to use the new service address. In addition, you must change the implementation so that calls to the client proxy will return a List<Person> instead of an array. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. In the context menu for the service reference in the ASP.NET project, select the Configure Service Reference command, and set the collection type to System.Collections.Generic.List.
- B. In the context menu for the service reference in the ASP.NET project, select the Update Service Reference command to retrieve the new service configuration.
- C. Change the service interface and implementation to return a List<Person>
- D. Edit the address property of the endpoint element in the web.config file to use the new service address.

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 21

You use the ASP.NET Web Site template to create a Web site that will be deployed to multiple locations. Each location will specify its SMTP configuration settings in a separate file named smtp.config in the root folder of the Web site.

You need to ensure that the configuration settings that are specified in the smtp.config file will be applied to the Web site.

Which configuration should you use in web.config?

- A.

```
<configuration>
  <system.net>
    <mailSettings>
      <smtp configSource="smtp.config" allowOverride="true">
        <network host="127.0.0.1" port="25"/>
      </smtp>
    </mailSettings>
  </system.net>
</configuration>
```
- B.

```
<configuration>
  <system.net>
    <mailSettings>
      <smtp configSource="smtp.config" />
    </mailSettings>
  </system.net>
</configuration>
```
- C.

```
<configuration xmlns:xdt="http://schemas.microsoft.com/XML-Document-Transform">
  <location path="smtp.config" xdt:Transform="Replace"
    xdt:Locator="Match(path)">
    <system.net />
  </location>
</configuration>
```
- D.

```
<configuration>
  <location path="smtp.config">
    <system.net>
      <mailSettings>
        <smtp Delivery Method="Network" >
          <Network Host = "127.0.0.1" Port="25"/>
        </smtp>
      </mailSettings>
    </system.net>
  </location>
</configuration>
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 22

You deploy an ASP.NET application to an IIS server.

You need to log health-monitoring events with severity level of error to the Windows application event log. What should you do?

- A. Run the aspnet_regiis.exe command.
- B. Set the Treat warnings as errors option to All in the project properties and recompile.
- C. Add the following rule to the <healthMonitoring/> section of the web.config file.

```
<rules>
  <add name="Failures"
    eventName="Failure Audits"
    provider="EventLogProvider" />
</rules>
```
- D. Add the following rule to the <healthMonitoring/> section of the web.config file.

```
<rules>
  <add name="Errors"
    eventName="All Errors"
    provider="EventLogProvider" />
</rules>
```

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 23

You are implementing an ASP.NET page. The page includes a method named GetCustomerOrderDataSet that returns a DataSet.

The DataSet includes a DataTable named CustomerDetailsTable and a DataTable named OrderDetailsTable.

You need to display the data in OrderDetailsTable in a DetailsView control named dtlView.

Which code segment should you use?

- A.

```
dtlView.DataSource = GetCustomerOrderDataSet();
dtlView.DataMember = "OrderDetailsTable";
dtlView.DataBind();
```
- B.

```
dtlView.DataSource = GetCustomerOrderDataSet();
dtlView.DataSourceID = "OrderDetailsTable";
dtlView.DataBind();
```
- C.

```
dtlView.DataSource = GetCustomerOrderDataSet();
dtlView.DataKeyNames = new string [] { "OrderDetailsTable"}; dtlView.DataBind();
```
- D.

```
DataSet dataSet = GetCustomerOrderDataSet();
dtlView.DataSource = new DataTable("dataSet", "OrderDetailsTable"); dtlView.DataBind();
```

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 24

You are implementing an ASP.NET page. You add and configure the following ObjectDataSource. <asp:ObjectDataSource SelectMethod="GetProductByProductId" ID="odc" runat="server" TypeName="ProductDAL">
 <SelectParameters>
 <asp:Parameter Name="productId" Type="Int32" />
 </SelectParameters>
 </asp:ObjectDataSource>

The page will be called with a query string field named pid. You need to configure the ObjectDataSource control to pass the value of the pid field to GetProductsByProductId method. What should you do?

- A. Replace the asp.QueryStringParameter with the following declaration.
 <asp.QueryStringParameter DefaultValue="pid" Name="productId" Type="Int32" />
- B. Replace the asp.QueryStringParameter with the following declaration.
 <asp.QueryStringParameter QueryStringField="pid" Name="productId" Type="Int32" />
- C. Add the following event handler to the Selecting event of the ObjectDataSource control.
 protected void odc_Selecting(object sender,
 ObjectDataSourceSelectingEventArgs e)
 {
- D. InputParameters["pid"] = Request.QueryString["productId"]; }
- E. Add the following code segment to the page's code-behind.
 protected void Page_Load(object sender, EventArgs e)
 {
 odc.SelectParameters.Add("productId", Request.QueryString["pid"]);

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 25

You are implementing an ASP.NET Web application that retrieves data from a Microsoft SQL Server database. You add a page that includes the following data source control.

```
<asp:SqlDataSource id="sqlds" runat="server"
ConnectionString="<%%$ ConnectionStrings:MyDB %>"
SelectCommand="SELECT * FROM Companies" />
```

The page is accessed frequently, but the data in the database rarely changes. You need to cache the retrieved data so that the database is not queried each time the Web page is accessed.

What should you do?

- A. Add the following attributes to the SqlDataSource control.
 DataSourceMode="DataSet"
 EnableCaching="True"
 CacheDuration="120"
- B. Add the following attributes to the SqlDataSource control.
 DataSourceMode="DataReader"
 EnableCaching="True"
 CacheDuration="120"

C. Add the following configuration to the <system.web/> section of the web.config file.

```
<キャッシング>  
<sqlCacheDependency enabled="true">  
<databases>  
<add name="MyDBCache"  
connectionStringName="MyDB"  
pollTime="120" />  
</databases>  
</sqlCacheDependency>  
</キャッシング>
```

D. Add the following configuration to the <system.web/> section of the web.config file.

```
<キャッシング>  
<sqlCacheDependency enabled="true" pollTime="120">  
<databases>  
<add name="MyDBCache"  
connectionStringName="MyDB" />  
</databases>  
</sqlCacheDependency>  
</キャッシング>
```

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 26

You are implementing an ASP.NET page. Client-side script requires data. Your application includes a class named Person with a Name property of type string. The code-behind file of the page includes the following code segment.

```
public string JsonValue;
```

```
List<Person> people = GetPeopleList();
```

```
JavaScriptSerializer json = new JavaScriptSerializer();
```

You need to use the JavaScriptSerializer class to serialize only the Name property of each item in the people list.

Which code segment should you use?

A. JsonValue = json.Serialize(people.Select(p => p.Name));

B. var names = from person in people
select person;
JsonValue = "{" + json.Serialize(names) + "}";

C. JsonValue = json.Serialize(people.SelectMany(p =>Name.AsEnumerable()));

D. var names = from person in people
select person;
JsonValue = json.Serialize(names);

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 27

You are implementing an ASP.NET application that uses LINQ to Entities to access and update the database.

The application includes the following method to update a detached entity of type Person.

```
private NorthwindContext _entities;  
public void UpdatePerson(Person personToEdit)  
{  
}
```

You need to implement the UpdatePerson method to update the database row that corresponds to the personToEdit object.

Which code segment should you use?

- A. `_entities.People.Attach(personToEdit);
_entities.ObjectStateManager.ChangeObjectState(
personToEdit,
EntityState.Modified);
_entities.SaveChanges();`
- B. `_entities.ObjectStateManager.ChangeObjectState(
personToEdit,
EntityState.Added);
_entities.SaveChanges();`
- C. `_entities.People.ApplyCurrentValues(personToEdit);
_entities.SaveChanges();`
- D. `_entities.People.Attach(new Person() { Id = personToEdit.Id }); _entities.ObjectStateManager.
ChangeObjectState(
personToEdit,
EntityState.Modified);
_entities.SaveChanges();`

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 28

You are implementing an ASP.NET application. You add the following code segment.

```
public List<Person> GetNonSecretUsers()  
{  
    string[] secretUsers = {"@secretUser", "@admin", "@root"}; List<Person> allPeople = GetAllPeople();  
    ... }  
}
```

You need to add code to return a list of all Person objects except those with a UserId that is contained in the secretUsers list. The resulting list must not contain duplicates.

Which code segment should you use?

- A. `var secretPeople = (from p in allPeople
 from u in secretUsers
 where p.UserId == u
 select p).Distinct();
return allPeople.Except(secretPeople);`
- B. `return from p in allPeople
 from u in secretUsers
 where p.UserId != u
 select p;`
- C. `return (from p in allPeople
 from u in secretUsers
 where p.UserId != u
 select p).Distinct();`

```
D. List<Person> people = new List<Person>(
    from p in allPeople
    from u in secretUsers
    where p.UserId != u
    select p);
return people.Distinct();
```

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 29

You are implementing an ASP.NET Web site. The Web site contains a Web service named CustomerService. The code-behind file for the CustomerService class contains the following code segment.

```
public class ProductService :
    System.Web.Services.WebService
{
    public List<Product> GetProducts(int categoryID)
    {
        return GetProductsFromDatabase(categoryID);
    }
}
```

You need to ensure that the GetProducts method can be called by using AJAX. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Apply the WebService attribute to the ProductService class.
- B. Apply the ScriptService attribute to the ProductService class.
- C. Apply the WebMethod attribute to the GetProducts method.
- D. Apply the ScriptMethod attribute to the GetProducts method.

Answer: BC

Section: (none)

Explanation/Reference:

QUESTION 30

You are implementing a WCF service library.

You add a new code file that contains the following code segment.

```
namespace ContosoWCF
{
    [ServiceContract]
    public interface IRateService
    {
        [OperationContract]
        decimal GetCurrentRate();
    }
    public partial class RateService : IRateService
    {
        public decimal GetCurrentRate()
        {
            decimal currentRate = GetRateFromDatabase();
```

```

return currentRate;
}
}
}

```

You build the service library and deploy its assembly to an IIS application. You need to ensure that the GetCurrentRate method can be called from JavaScript.

What should you do?

- A. Add a file named Service.svc to the IIS application.
Add the following code segment to the file.
`<%@ ServiceHost Service="ContosoWCF.IRateService" Factory="System.ServiceModel.Activation.WebScriptServiceHostFactory" %>`
- B. Add a file named Service.svc to the IIS application.
Add the following code segment to the file.
`<%@ ServiceHost Service="ContosoWCF.RateService" Factory="System.ServiceModel.Activation.WebScriptServiceHostFactory" %>`
- C. Apply the script service attribute to rate service class. Rebuild the WCF service library, and redeploy the assembly to the IIS application.
- D. Apply the Web get attribute to the Get Current rate interface Method. Rebuild the WCF service library, and redeploy the assembly to the IIS application.

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 31

You are implementing an ASP.NET Web site. The site contains the following class.

```

public class Address
{
    public int AddressType;
    public string Line1;
    public string Line2;
    public string City;
    public string ZipPostalCode;
}

```

The Web site interacts with an external data service that requires Address instances to be given in the following XML format.

```

<Address AddressType="2">
<Line1>250 Race Court</Line1>
<City>Chicago</City>
<PostalCode>60603</PostalCode>
</Address>

```

You need to ensure that Address instances that are serialized by the XmlSerializer class meet the XML format requirements of the external data service.

Which two actions should you perform (Each correct answer presents part of the solution. Choose two.)

- A. Add the following attribute to the AddressType field.
[XmlAttribute]
- B. Add the following attribute to the Line2 field.
[XmlElement(IsNullable=true)]
- C. Add the following attribute to the ZipPostalCode field.
[XmlAttribute("ZipCode")]

- D. Add the following attribute to the ZipPostalCode field.
[XmlElement("ZipCode")]

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 32

You are implementing an ASP.NET Dynamic Data Web site.

The Web site includes a data context that enables automatic scaffolding for all tables in the data model. The Global.asax.cs file contains the following code segment. public static void RegisterRoutes(RouteCollection

```
routes) { {  
routes.Add(new DynamicDataRoute("{table}/ListDetails.aspx") {  
Action = PageAction.List,  
ViewName = "ListDetails",  
Model = DefaultModel  
});  
routes.Add(new DynamicDataRoute("{table}/ListDetails.aspx") {  
Action = PageAction.Details,  
ViewName = "ListDetails",  
Model = DefaultModel  
});  
}
```

You need to display the items in a table named Products by using a custom layout.

What should you do?

- A. Add a new Web page named Products.aspx to the Dynamic Data\PageTemplates folder of the Web site.
- B. Add a new folder named Products to the Dynamic Data\CustomPages folder of the Web site. Add a new Web page named ListDetails.aspx to the Products folder.
- C. Add a new Web user control named Products.ascx to the Dynamic Data\Filters folder of the Web site.

In the code-behind file for the control, change the base class from UserControl to System.Web.
DynamicData.QueryableFilterUserControl.

- D. Add a new Web user control named Products_ListDetails.ascx to the Dynamic Data\EntityTemplates folder of the Web site.

In the code-behind file for the control, change the base class from UserControl to System.Web.
DynamicData.EntityTemplateUserControl.

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 33

You are implementing a new Dynamic Data Web site.

The Web site includes a Web page that has an ObjectDataSource control named ObjectDataSource1.

ObjectDataSource1 interacts with a Web service that exposes methods for listing and editing instances of a class

named Product.

You add a GridView control named GridView1 to the page, and you specify that GridView1 should use ObjectDataSource1 as its data source.

You then configure GridView1 to auto-generate fields and to enable editing. You need to add Dynamic Data behavior to GridView1. You also must ensure that users can use GridView1 to update Product instances. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add a DynamicDataManager control to the Web page.
- B. Disable the auto-generated fields on GridView1. Add a DynamicField control for each field of the Product class.
- C. Add the following code segment to the Application_Start method in the Global.asax.cs file.

```
DefaultModel.RegisterContext(
    typeof(System.Web.UI.WebControls.ObjectDataSource),
    new ContextConfiguration() {ScaffoldAllTables = true});
```
- D. Add the following code segment to the Page_Init method of the Web page.

```
GridView1.EnableDynamicData(typeof(Product));
```

Answer: BD

Section: (none)

Explanation/Reference:

QUESTION 34

You create a new ASP.NET MVC 2 Web application. The following default routes are created in the Global.asax.cs file. (Line numbers are included for reference only.)

```
01 public static void RegisterRoutes
02 {
03     RouteCollection routes)
04 {
05     routes.IgnoreRoute("{resource}.axd/{*pathInfo}");
06     routes.MapRoute(
07         "Default",
08         "{controller}/{action}/{id}",
09         new { controller = "Home", action = "Index", id = "" }
10     );
11 }
```

You implement a controller named HomeController that includes methods with the following signatures.

```
public ActionResult About()
public ActionResult Index()
public ActionResult Details(int id)
```

You need to ensure that the About action is invoked when the root URL of the site is accessed. What should you do?

- A. At line 04 in the Global.asax.cs file, add the following line of code.

```
routes.MapRoute("Default4Empty", "/", new {controller="Home", action="About"} );
```
- B. At line 04 in the Global.asax.cs file, add the following line of code.

```
routes.MapRoute("Default", "", new { controller="Home",
    action="About"} );
```
- C. Replace line 05 in the Global.asax.cs file with the following line of code.

```
routes.MapRoute(v "Default4Empty",
    "{controller}/{action}/{id}",
    new {controller="Home", action="About", id=""} );
```
- D. Replace line 05 in the Global.asax.cs file with the following line of code.

```
routes.MapRoute(
    "Default",
    "{controller}/{action}",
    new {controller="Home", action ="About"}
);
```

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 35

You create a new ASP.NET MVC 2 Web application. The following default routes are created in the Global.asax.cs file. (Line numbers are included for reference only.)

```
01 public static void RegisterRoutes
(RouteCollection routes)
02 {
03     routes.IgnoreRoute("{resource}.axd/{*pathInfo}");
04
05     routes.MapRoute(
06         "Default",
07         "{controller}/{action}/{id}",
08         new { controller = "Home", action = "Index", id = "" }
09     );
10 }
```

You implement a controller named HomeController that includes methods with the following signatures.

```
public ActionResult Index()
public ActionResult Details(int id)
public ActionResult DetailsByUsername(string username)
```

You need to add a route to meet the following requirements. ?The details for a user must to be displayed when a user name is entered as the path by invoking the DetailsByUsername action.

?User names can contain alphanumeric characters and underscores, and can be between 3 and 20 characters long.

What should you do?

A. Replace line 05 with the following code segment.

```
routes.MapRoute(
    "Default",
    "{controller}/{action}/{id}",
    new { controller = "Home", action = "DetailsByUsername",
        id = "" }
);
```

B. Replace line 05 with the following code segment.

```
routes.MapRoute(
    "Default",
    "{controller}/{action}/{username}",
    new { controller = "Home", action = "DetailsByUsername",
        username = "" },
    new { username = @"\w{3,20}" }
);
```

C. At line 04, add the following code segment.

```
routes.MapRoute(
    "Details by Username",
    "{username}",
    new { controller = "Home", action = "DetailsByUsername" }, new { username = @"\w{3,20}" }
);
```

D. At line 04, add the following code segment.

```
routes.MapRoute(
    "Details by Username",
    "{id}",
    new { controller = "Home", action = "DetailsByUsername" }, new { id = @"\w{3,20}" }
);
```

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 36

You are implementing an ASP.NET MVC 2 Web application.

The URL with path /Home/Details/{country} will return a page that provides information about the named country.

You need to ensure that requests for this URL that contain an unrecognized country value will not be processed by the Details action of HomeController.

What should you do?

- A. Add the ValidateAntiForgeryToken attribute to the Details action method.
- B. Add the Bind attribute to the country parameter of the Details action method. Set the attribute's Prefix property to Country.
- C. Create a class that implements the IRouteConstraint interface. Configure the default route to use this class.
- D. Create a class that implements the IRouteHandler interface. Configure the default route to use this class.

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 37

You are implementing an ASP.NET MVC 2 Web application that allows users to view and edit data. You need to ensure that only logged-in users can access the Edit action of the controller. What are two possible attributes that you can add to the Edit action to achieve this goal? (Each correct answer presents a complete solution. Choose two.)

- A. [Authorize(Users = "")]
- B. [Authorize(Roles = "")]
- C. [Authorize(Users = "*")]
- D. [Authorize(Roles = "*")]

Answer: AB

Section: (none)

Explanation/Reference:

QUESTION 38

You are implementing an ASP.NET MVC 2 Web application. A controller contains the following code.

```
public ActionResult Edit(int id)
{
    return View(SelectUserToEdit(id));
}
public ActionResult Edit(Person person)
{

```

```
UpdateUser(person);  
return RedirectToAction("Index");  
}
```

The first Edit action displays the user whose details are to be edited, and the second Edit action is called when the Save button on the editing form is clicked to update the user details. An exception is thrown at run time stating that the request for action Edit is ambiguous. You need to correct this error and ensure that the controller functions as expected. What are two possible ways to achieve this goal? (Each correct answer presents a complete solution. Choose two.)

- A. Add the following attribute to the first Edit action. [AcceptVerbs(HttpVerbs.Head)]
- B. Add the following attribute to the first Edit action. [HttpGet]
- C. Add the following attribute to the second Edit action. [HttpPost]
- D. Add the following attribute to the second Edit action. [HttpPut]

Answer: BC

Section: (none)

Explanation/Reference:

QUESTION 39

You are implementing an ASP. NET MVC 2 Web application. You add a controller named CompanyController. You need to modify the application to handle the URL path /company/info. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add the following method to the CompanyController class.

```
public ActionResult INFO ()  
{  
    return View();  
}
```
- B. Add the following method to the CompanyController class.

```
public ActionResult Company_Info()  
{  
    return View();  
}
```
- C. Right-click the Views folder, and select View from the Add submenu to create the view for the action.
- D. Right-click inside the action method in the CompanyController class, and select Add View to create a view for the action.

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 40

You create an ASP.NET MVC 2 Web application. You implement a single project area in the application. In the Areas folder, you add a subfolder named Test. You add files named TestController.cs and Details.aspx to the appropriate subfolders.

You register the area's route, setting the route name to test_default and the area name to test. You create a view named Info.aspx that is outside the test area. You need to add a link to Info.aspx that points to Details.aspx.

Which code segment should you use?

- A. <%= Html.RouteLink("Test", "test_default",
new {area = "test"}, null) %>
- B. <%= Html.ActionLink("Test", "Details", "Test",
new {area = "test"}, null) %>
- C. <a href="<%= Html.RouteLink("Test", "test_default",
new {area = "test"}, null) %>">Test
- D. <a href="<%= Html.ActionLink("Test", "Details", "Test",
new {area = "test"}, null) %>">Test

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 41

You are implementing an ASP.NET MVC 2 application. In the Areas folder, you add a subfolder named Product to create a single project area.

You add files named ProductController.cs and Index.aspx to the appropriate subfolders. You then add a file named Route.cs to the Product folder that contains the following code. (Line numbers are included for reference only.)

```
01 public class Routes : AreaRegistration
02 {
03     public override string AreaName
04     {
05         get { return "product"; }
06     }
07
08     public override void RegisterArea(
09         AreaRegistrationContext context)
10     {
11         context.MapRoute("product_default",
12             "product/{controller}/{action}/{id}",
13             new { controller = "Product", action = "Index",
14                 id = "" });
15     }
16 }
```

When you load the URL `http://<applicationname>/product`, you discover that the correct page is not returned.

You need to ensure that the correct page is returned.

What should you do?

- A. Replace line 10 with the following code segment.
`context.MapRoute("product_default",
 "{area}/{controller}/{action}/{id}",
 new {area="product", controller = "Product", action = "Index", id = "" });`
- B. Replace line 10 with the following code segment.
`context.MapRoute("product_default",
 "area",`
- C. Add the following code segment at line 11
`AreaRegistration.RegisterAllAreas();`
- D. Add the following Code segment to the Register Routes in global asax.cs file Area Registration.
`RegisterAllAreas();`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 42

You are implementing an ASP.NET MVC 2 Web application.

You create a shared user control named MenuBar.ascx that contains the application's menu.

You need to use the menu bar in all application views.

What should you do?

- A. In the site's master page, create a div element with an ID of Navigation.
Add the following code segment inside this div element.
`<% Html.RenderPartial("~/Views/Shared/MenuBar.ascx"); %>`
- B. In the site's master page, create a div element with an ID of Navigation.
Add the following code segment inside this div element.
`<%= Url.Content("~/Views/Shared/MenuBar.ascx") %>`
- C. In each of the controller's action methods, add an entry to the ViewData collection with a key of Navigation and a value of ~/Views/Shared/MenuBar.ascx.
- D. In the site's Global.asax.cs file, register a route named Navigation that points to the ~/Views/Shared/MenuBar.ascx file.

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 43

You are implementing an ASP.NET MVC 2 Web application that contains several folders. The Views/Shared/DisplayTemplates folder contains a templated helper named Score.ascx that performs custom formatting of integer values.

The Models folder contains a class named Player with the following definition.

```
public class Player
{
    public String Name { get; set; }
    public int LastScore { get; set; }
    public int HighScore { get; set; }
}
```

You need to ensure that the custom formatting is applied to LastScore values when the HtmlHelper.

DisplayForModel method is called for any view in the application that has a model of type Player.

What should you do?

- A. Rename Score.ascx to LastScore.ascx.
- B. Move Score.ascx from the Views/Shared/DisplayTemplates folder to the Views/Player/DisplayTemplates folder.
- C. Add the following attribute to the LastScore property.
`[UIHint("Score")]`
- D. Add the following attribute to the LastScore property.
`[Display(Name="LastScore", ShortName="Score")]`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 44

You create an ASP.NET MVC 2 Web application that contains the following controller class.

```
public class ProductController : Controller
{
    static List<Product> products = new List<Product>();
    public ActionResult Index()
    {
        return View();
    }
}
```

In the Views folder of your application, you add a view page named Index.aspx that includes the following @ Page directive.

```
<%@ Page Inherits="System.Web.Mvc.ViewPage" %>
```

You test the application with a browser. You receive the following error message when the Index method is invoked: "The view 'Index' or its master was not found."

You need to resolve the error so that the new view is displayed when the Index method is invoked.

What should you do?

- A. Change the name of the Index.aspx file to Product.aspx.
- B. Create a folder named Product inside the Views folder. Move Index.aspx to the Product folder.
- C. Replace the @ Page directive in Index.aspx with the following value.

```
<%@ Page Inherits="System.Web.Mvc.ViewPage<Product>" %>
```
- D. Modify the Index method by changing its signature to the following:

```
public ActionResult Index(Product p)
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 45

You are implementing an ASP.NET MVC 2 Web application that contains the following class.

```
public class DepartmentController : Controller
{
    static List<Department> departments =
        new List<Department>();
    public ActionResult Index()
    {
        return View(departments);
    }
    public ActionResult Details(int id)
    {
        return View(departments.Find(x => x.ID==id));
    }
    public ActionResult ListEmployees(Department d)
    {
        List<Employee> employees = GetEmployees(d);
        return View(employees);
    }
}
```

}

You create a strongly typed view that displays details for a Department instance. You want the view to also include a listing of department employees. You need to write a code segment that will call the ListEmployees action method and output the results in place.

Which code segment should you use?

- A. `<%= Html.Action("ListEmployees", Model) %>`
- B. `<%= Html.ActionLink("ListEmployees", "Department", "DepartmentController") %>`
- C. `<% Html.RenderPartial("ListEmployees", Model); %>`
- D. `<%= Html.DisplayForModel("ListEmployees") %>`

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 46

You are testing an existing ASP.NET page. The page includes a text box. You are able to execute malicious JavaScript code by typing it in the text box and submitting. You need to configure the page to prevent JavaScript code from being submitted by the text box. In the @ Page directive, which attribute should you set to true?

- A. the EnableEventValidation attribute
- B. the ResponseEncoding attribute
- C. the ValidateRequest attribute
- D. the Strict attribute

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 47

You are implementing an ASP.NET Web site that will be accessed by an international audience. The site contains global and local resources for display elements that must be translated into the language that is selected by the user.

You need to ensure that the Label control named lblCompany displays text in the user's selected language from the global resource file.

Which control markup should you use?

- A. `<asp:Label ID="lblCompany" runat="server" meta:resourcekey="lblCompany" />`
- B. `<asp:Label ID="lblCompany" runat="server" Text="meta:lblCompany.Text" />`
- C. `<asp:Label ID="lblCompany" runat="server" Text="<%= $Resources:lblCompanyText %>" />`
- D. `<asp:Label ID="lblCompany" runat="server" Text="<%= $Resources:WebResources, lblCompanyText %>" />`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 48

You are implementing an ASP.NET page in an e-commerce application. Code in a btnAddToCart_Click event handler adds a product to the shopping cart.

The page should check the status of the shopping cart and always show a cart icon when one or more items are in the shopping cart. The page should hide the icon when the shopping cart has no items. You need to add an event handler to implement this requirement.

Which event handler should you add?

- A. btnAddToCart_Click
- B. Page_Load
- C. Page_PreRender
- D. Page_PreInit

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 49

You are implementing a read-only page that includes the following controls. <asp:Button ID="btnRefresh" runat="server" Text="Button" /> <asp:GridView ID="gvCustomers" runat="server"

EnableViewState="False"

OnDataBinding="gvCustomers_DataBinding">

</asp:GridView>

You disable view state to improve performance.

You need to ensure that the page is updated to display the latest data when the user clicks the refresh button. Which code segment should you use?

- A.

```
protected void Page_PreInit(object sender, EventArgs e)
{
    if (!IsPostBack)
    {
        gvCustomers.DataSource = GetCustomers();
        gvCustomers.DataBind();
    }
}
```
- B.

```
protected void Page_Load(object sender, EventArgs e)
{
    gvCustomers.DataSource = GetCustomers();
    gvCustomers.DataBind();
}
```
- C.

```
protected void gvCustomers_DataBinding(object sender, EventArgs e) {
    gvCustomers.DataSource = GetCustomers();
    gvCustomers.DataBind();
}
```

D.

```
protected void Page_PreRender(object sender, EventArgs e) {  
    if (!IsPostBack)  
    {  
        gvCustomers.DataSource = GetCustomers();  
        gvCustomers.DataBind();  
    }  
}
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 50

You create an ASP.NET page named TestPage.aspx that contains validation controls. You need to verify that all input values submitted by the user have been validated by testing the Page.IsValid property. Which page event should add an event handler to?

- A. Init
- B. Load
- C. PreInit
- D. PreLoad

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 51

You are implementing an ASP.NET page that hosts a user control named CachedControl. You need to ensure that the content of the user control is cached for 10 seconds and that it is regenerated when fetched after the 10 seconds elapse.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Modify the hosting page's caching directive as follows.
<%@ OutputCache Duration="10" VaryByParam="None" %>
- B. Add the following meta tag to the Head section of the hosting page.
<meta http-equiv="refresh" content="10">
- C. Add the following caching directive to the hosted control.
<%@ OutputCache Duration="10" VaryByParam="None" %>
- D. Add the following caching directive to the hosted control.
<%@ OutputCache Duration="10" VaryByControl="None" %>

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 52

You have created an ASP.NET server control named ShoppingCart for use by other developers. Some developers report that the ShoppingCart control does not function properly with ViewState disabled. You want to ensure that all instances of the ShoppingCart control work even if ViewState is disabled. What should you do?

- A. Require developers to set EnableViewStateMac to true.
- B. Store state in ControlState instead of ViewState.
- C. Serialize the state into an Application state entry called "MyControl"
- D. Require developers to change the session state mode to SQL Server.

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 53

You are troubleshooting an ASP.NET Web application. System administrators have recently expanded your web farm from one to two servers. Users are periodically reporting an error message about invalid view state. You need to fix the problem. What should you do?

- A. Set viewStateEncryptionMode to Auto in web.config on both servers.
- B. Set the machineKey in machine.config to the same value on both servers.
- C. Change the session state mode to SQL Server on both servers and ensure both servers use the same connection string.
- D. Override the SavePageStateToPersistenceMedium and LoadPageStateFromPersistenceMedium methods in the page base class to serialize the view state to a local web server file.

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 54

You are developing a Web page. The user types a credit card number into an input control named cc and clicks a button named submit. The submit button sends the credit card number to the server. A JavaScript library includes a CheckCreditCard function that returns a value of true if the credit card appears to be valid, based on its checksum.

You need to ensure that the form cannot be used to submit invalid credit card numbers to the server. What should you do?

- A. Configure the input control to run on the server. On the submit button, add a server-side OnClick handler that calls CheckCreditCard and rejects the form submission if the input is invalid.
- B. On the input control, add an onChange handler that calls CheckCreditCard and cancels the form submission when the input is invalid.
- C. Configure the input control and the submit button to run on the server. Add a submit_OnClick handler that calls CheckCreditCard and rejects the form submission if the input is invalid.
- D. On the form, add an onSubmit handler that calls CheckCreditCard and cancels the form submission if the input is invalid.

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 55

You are implementing an ASP.NET page that includes a text box. You need to validate values that are typed by users to ensure that only numeric values are submitted.

Which control markup should you use?

- A. `<asp:TextBox ID="txt1" runat="server" CausesValidation="true" ValidationGroup="Numeric" />`
- B. `<asp:TextBox ID="txt1" runat="server" EnableClientScript="true" ValidationGroup="Numeric" />`
- C. `<asp:TextBox ID="txt1" runat="server" />
<asp:RegularExpressionValidator ID="val1" runat="server" ControlToValidate="txt1" ValidationExpression="[0-9]*" ErrorMessage="Invalid input value" />`
- D. `<asp:TextBox ID="txt1" runat="server" />
<asp:RegularExpressionValidator ID="val1" EnableClientScript="true" ControlToValidate="txt1" ValidationExpression="[0-9]*" ErrorMessage="Invalid input value" />`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 56

You are implementing an ASP.NET Web page.

You need to add a text box that allows only values between 1 and 10, inclusive, to be submitted. Which two code segments should you use? (Each correct answer presents part of the solution. Choose two.)

- A. `<script type="text/javascript">
function validate_value(obj, args) {
return
(args.Value >= 1 && args.Value <= 10);
}
</script>`
- B. `<script type="text/javascript">
function validate_value(obj, args) {
args.IsValid =
(args.Value >= 1 && args.Value <= 10);
}
</script>`

- C. `<asp:TextBox ID="txt1" runat="server" />`
`<asp:CustomValidator ID="val1" runat="server"`
`ControlToValidate="txt1"`
`ClientValidationFunction="validate_value"`
`ErrorMessage="Value invalid" />`
- D. `<asp:TextBox ID="txt1" runat="server"`
`onChange="validate_value(this, args)" />`

Answer: BC

Section: (none)

Explanation/Reference:

QUESTION 57

You are implementing a Web page that allows users to upload files to a Web server. The page includes a form that has a Submit button.

You want to restrict uploads so that only files smaller than 1 MB can be uploaded.

What should you do?

- A. Add an HTML input type="file" control.
Add an onSubmit handler to the form to check the file size and cancel the form submission if the file size is too large.
- B. Add an HTML input type="file" control.
Add an onChange handler to the input control to check the file size and cancel the upload if the file size is too large.
- C. Add an ASP.NET FileUpload control and configure it to run on the server.
Add a server-side OnClick handler to the form's Submit button to save the file only if the file size is allowed
- D. Add an ASP.NET FileUpload control and configure it to run on the server.
Add a server-side OnDataBinding handler that saves the file only if the file size is allowed.

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 58

You are dynamically adding controls to an ASP.NET page in the Page_Load event handler. The page will have text boxes that correspond to the columns in a database table. Each text box will be preceded by a label that displays the name of the corresponding column.

You need to create the form so that when the user clicks the label, the corresponding text box is selected for input.

What should you do?

- A. For each column, output the following HTML, where COL is replaced by the name of the column.
`<label>COL</label>`
`<input name="COL" type="text" id="COL" />`
- B. For each column, output the following HTML, where COL is replaced by the name of the column.
`<label AssociatedControlID="COL">COL</label>`
`<input name="COL" type="text" id="COL" />`
- C. For each column, create an asp:Label control and a corresponding asp:TextBox that have the same ID.

- D. For each column, create an asp:Label control and set the AssociatedControlID to the ID of the corresponding asp:Textbox control.

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 59

You create a Web page that has an ASP.NET menu. You need to ensure that the menu items are populated from an array of strings in your code-behind file. What should you do?

- A. Write a JavaScript function that uses document.write to write out an asp:MenuItem for each string array element.
- B. In the Page_Render handler, use Response.Write to write out an asp:MenuItem for each string array element.
- C. Set the DataSource attribute of asp:Menu to the name of the array.
- D. In the Page_Load handler, create an instance of asp:MenuItem for each string array element, and add each of these instances to the menu's Items collection.

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 60

You are implementing a Web page that displays text that was typed by a user. You need to display the user input in the Web page so that a cross-site scripting attack will be prevented. What should you do?

- A. Call document.write.
- B. Call Response.Write.
- C. Call HttpUtility.UrlEncode.
- D. Call HttpUtility.HtmlEncode.

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 61

You create a Web page that contains drop-down menus that are defined by using div tags in the following code.

```
<div class="dropdown-menu">
<div class="menu-title">Menu One</div>
<div class="menu-items" style="display:none;">
<div><a href="#">Item One</a></div>
<div><a href="#">Item Two</a></div>
</div>
```

```

</div>
<div class="dropdown-menu">
<div class="menu-title">Menu Two</div>

<div class="menu-items" style="display:none;">
<div><a href="#">Item Three</a></div>
<div><a href="#">Item Four</a></div>
</div>
</div>

```

You need to write a JavaScript function that will enable the drop-down menus to activate when the user positions the mouse over the menu title.
Which code segment should you use?

- A.

```
$(".dropdown-menu").hover(
function () {
$(".menu-items").slideDown(100);
},
function () {
$(".menu-items").slideUp(100);
}
);
```
- B.

```
$(".dropdown-menu").hover(
function () {
$(".menu-items", this).slideDown(100);
},
function () {
$(".menu-items", this).slideUp(100);
}
);
```
- C.

```
$(".dropdown-menu").hover(
function () {
$(this).slideDown(100);
},
function () {
$(this).slideUp(100);
}
);
```
- D.

```
$(".dropdown-menu").hover(
function () {
$("this", ".menu-title").slideDown(100);
},
function () {
$("this.menu-title",).slideUp(100);
}
);
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 62

You are implementing an ASP.NET application that makes extensive use of JavaScript libraries. Not all pages use all scripts, and some scripts depend on other scripts. When these libraries load sequentially, some of your

pages load too slowly. You need to use the ASP.NET Ajax Library Script Loader to load these scripts in parallel. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. In your site's master page, add a call to `Sys.loader.defineScripts` to define each of the scripts that are used in the site.
- B. In your site's master page, add a call to `Sys.loader.registerScript` to define each of the scripts that are used in the site.
- C. In each page that uses scripts, add a call to `Sys.get` for each script that is needed in that page.
- D. In each page that uses scripts, add a call to `Sys.require` for each script that is needed in that page.

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 63

You create a Web page that contains the following image element.

```

```

You need to write a JavaScript function that will dynamically change which image is displayed.

Which code segment should you use?

- A.

```
function changelImage() {  
    myImage.src = "image2.png";  
}
```
- B.

```
function changelImage() { document.getElementById("myImage").src = "image2.png"; }
```
- C.

```
function changelImage() { getElementById("myImage").src = "image2.png"; }
```
- D.

```
function changelImage() { window.getElementById("myImage").src = "image2.png"; }
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 64

A Web page includes the HTML shown in the following code segment `<span id="ref">`

```
<a name=Reference>Check out</a>
```

the FAQ on

```
<a href="http://www.contoso.com">
```

Contoso's web site for more information:

```
<a href="http://www.contoso.com/faq">FAQ</a>.
```

```
</span>
```

```
<a href="http://www.contoso.com/home">Home</a>
```

You need to write a JavaScript function that will dynamically format in boldface all of the hyperlinks in the ref span.

Which code segment should you use?

- A. `$("#ref").filter("a[href]").bold();`
- B. `$("#ref").filter("a").css("bold");`

- C. `$("#a").css({fontWeight:"bold"});`
D. `$("#ref a[href]").css({fontWeight:"bold"});`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 65

You create a Web page that contains the following div.

```
<div id="target">
</div>
```

You have a JavaScript array named `imageurls` that contains a list of image URLs. You need to write a JavaScript function that will insert images from the URLs into `target`. Which code segment should you use?

- A. `$(imageurls).each(function(i,url){
 $("#", url).append("#target");
});`
B. `$(imageurls).each(function(i,url){
 $("#target") += $("#").attr("src", url);
});`
C. `$.each(imageurls, function(i,url){
 $("#").attr("src", url).appendTo("#target");
});`
D. `$.each(imageurls, function(i,url){
 $("#target").append("").src = url;
});`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 66

You create a Web page that contains the following code.

```
<script type="text/javascript">
var lastId = 0;
</script>
<div class="File">
Choose a file to upload:
<input id="File0" name="File0" type="file" />
</div>
<input id="AddFile" type="button" value="Add a File" />
<input id="Submit" type="submit" value="Upload" />
```

You need to provide the following implementation.

?Each time the `AddFile` button is clicked, a new `div` element is created. ?The new `div` element is appended after the other file upload `div` elements and before the `AddFile` span.

?Each new element has a unique identifier.

Which code segment should you use?

- A. `$("#AddFile").click(function () {
var id = "File" + ++lastId;
var item = $(".File:first").clone(true);
$("input:file", item).attr({ id: id, name: id });
item.insertBefore("#AddFile");
});`
- B. `$("#AddFile").click(function () {
var id = "File" + ++lastId;
$(".File:first").clone(true)
.attr({ id: id, name: id })
.insertBefore("#AddFile");
});`
- C. `$("#AddFile").click(function () {
var id = "File" + ++lastId;
});`
- D. `$("#AddFile").click(function () {
var id = "File" + ++lastId;
var item = $(".File:first").clone(true)
$("input:file", item).attr({ id: id, name: id });
item.insertAfter("input[type=file]");
});`

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 67

You are building an ASP.NET control. The control displays data by using a table element with a class attribute value of Results.

The control should expose a client-side event named onrowselected that fires when a check box in a table row is selected.

You need to implement this client-side event.

What should you do?

- A. `$('.Results input:checked').onrowselected = function (e, sender) { ...
};`
- B. `$('.Results input:checked').bind('onrowselected', function (e, sender) {
...
});`
- C. `$('.Results').bind('onrowselected', function (e, sender) { ...
}).click(function (e) {
if ($(e.target).is('input:checked')) {
$('.Results').trigger('onrowselected', [$(e.target)]);
}
});`
- D. `$('.Results').onrowselected($.proxy($(this)
.find('input:checked'), function (e, sender) {
...
}));`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 68

You create a Web page that contains the following code. (Line numbers are included for reference only.)

```
01<script>
02function changeColor(c) {
03message.style.color=c;
04}
05</script>
07<p id="message">Welcome!</p>
08<ul id="color">
09<li>Black</li>
10<li>Red</li>
11</ul>
```

You need to ensure that when the user clicks an item in the list, the text color of the "Welcome!" message will change.

Which declaration should you use?

- A. `<ul id="color">`
 `<li onclick="changeColor(this.innerText);">Black</li>`
 `<li onclick="changeColor(this.innerText);">Red</li>`
 `</ul>`
- B. `<ul id="color">`
 `<li onclick="changeColor(this.style.color);">Black</li>`
 `<li onclick="changeColor(this.style.color);">Red</li>`
 `</ul>`
- C. `<ul id="color">`
 `<li><a onfocus="changeColor(this.innerText);">Red</a></li>`
 `<li><a onfocus="changeColor(this.innerText);">Black</a></li>`
 `</ul>`
- D. `<ul id="color">`
 `<li><a onfocus="changeColor(this.innerText);">Red</a></li>`
 `<li><a onfocus="changeColor(this.innerText);">Black</a></li>`
 `</ul>`

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 69

You are implementing an ASP.NET AJAX page. You add the following control to the page. `<asp:UpdatePanel ID="pn1" runat="server" UpdateMode="Conditional"> ... </ContentTemplate> </asp:UpdatePanel>` You need update the contents of the UpdatePanel without causing a full reload of the page. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add the following control before the UpdatePanel. `<asp:Timer ID="Timer1" OnLoad="Timer1_Tick" runat="server" Interval="3000" />`
- B. Add the following control within the UpdatePanel. `<asp:Timer ID="Timer1" OnLoad="Timer1_Tick" runat="server" Interval="3000" />`

- C. Add an AsyncPostBackTrigger that references Timer1.
- D. Add a PostBackTrigger that references Timer1.

Answer: BC

Section: (none)

Explanation/Reference:

QUESTION 70

You are implementing an ASP.NET AJAX page.

You add two UpdatePanel controls named pnlA and pnlB. pnlA contains an UpdatePanel control named pnlInner in its content template.

You have the following requirements.

Update panels pnlA and pnlB must refresh their content only when controls that they contain cause a postback.

Update panel pnlInner must refresh its content when controls in either pnlA or pnlB or pnlInner cause a postback.

You need to configure the panels to meet the requirements.

What should you do?

- A. Set the UpdateMode of pnlA and pnlB to Conditional. Set the UpdateMode of pnlInner to Always.
- B. Set the UpdateMode of pnlA and pnlB to Conditional. Set the UpdateMode of pnlInner to Conditional, and add AsyncPostBackTrigger elements to its Triggers element for every control in pnlA.
- C. Set the UpdateMode of pnlA and pnlB to Always. Set the UpdateMode of pnlInner to Conditional.
- D. Set the UpdateMode of pnlA and pnlB to Always. Set the UpdateMode of pnlInner to Always, and add AsyncPostBackTrigger elements to its Triggers element for every control in pnlB.

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 71

You are implementing an ASP.NET AJAX page that contains two div elements. You need to ensure that the content of each div element can be refreshed individually, without requiring a page refresh.

What should you do?

- A. Add two forms to the page. Add a script manager and an update panel to each form. Add a content template to each update panel, and move each div element into a content template.
- B. Add two forms to the page. Add a script manager and an update panel to each form. Add a content template to each update panel, and move each div element into a content template.
- C. Add a form and two update panels to the page. Add a script manager to the form. Add a content template to each update panel, and move a div element into each content template.
- D. Add a form and two update panels to the page. Add two script managers to the form, one for each update panel. Add a content template to each update panel, and move each div element into a content template.

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 72

You create an ASP.NET page. The page uses the jQuery \$.ajax function to make calls back to the server in several places.

You add the following div element to the page.

```
<div id="errorInfo">
</div>
```

You need to implement a single error handler that will add error information from all page \$.ajax calls to the div named errorInfo.

What should you do?

- A. Add the following options to each \$.ajax function call:
global: true,
error: function (XMLHttpRequest, textStatus, errorThrown){ \$("#errorInfo").text("Error information is: " + textStatus + "");
- B. Add the following code to the \$(document).ready function on the page:
\$("#errorInfo").ajaxError(function(event, request, settings){ \$(this).append("Error requesting page " + settings.url + ""); });
- C. Add the following option to each \$.ajax function call:
error: function (XMLHttpRequest, textStatus, errorThrown){ \$("#errorInfo").text("Error information is: " + textStatus + "");
}
- D. Add the following code to the \$(document).ready function on the page:
\$.ajaxError(function(event, request, settings){
\$(this).append("Error requesting page " + settings.url + "");});
Add the following option to each \$.ajax function call:
global: true

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 73

You create a Web page that contains the span shown in the following line of code.

```
<span id="span1">Text</span>
```

You need replace the contents of the span with HTML that you download from a URL specified by a global variable named localURL.

Which code segment should you use?

- A. \$.ajax({
type: "GET",
url: localURL,
dataType: "jsonp",
success: function(htmlText) {
\$("#span1").text(htmlText);
}
});

- B. `$.ajax(localURL, {},
function(htmlText) {
$("#span1").html(htmlText);
},
"html");`
- C. `$.ajax({
type: "GET",
url: localURL,
dataType: "html",
success: function(htmlText) {
$("#span1").innerHTML = htmlText;
}
});`
- D. `$.ajax({
type: "GET",
url: localURL,
success: function(htmlText) {
$("#span1").html(htmlText);
}
});`

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 74

A Web service returns a list of system users in the following format.

```
<xml version="1.0" >
<users>
<user id="first">
<name>Name of first user</name>
<email>first@contoso.com</email>
</user>
<user id="second">
<name>Name of second user</name>
<email>first@contoso.com</email>
</user>
</users>
```

You need to populate a drop-down menu with the IDs and names of the users from the Web service, in the order provided by the service.

Which code segment should you use?

- A. `$.ajax({
type: "GET",
url: serviceURL,
success: function(xml) {
$.each($(xml), function(i, item) {
$("<option>").attr("value", id)
.text(tx).appendTo("#dropdown");
});
}
});`

- B. `$.ajax({
 type: "GET",
 url: serviceURL,
 success: function(xml) {
 $(xml).find("user").each(function() {
 var id = $(this).id;
 var tx = $(this).name.text
 $("<option>").attr("value", id)
 .text(tx).appendTo("#dropdown");
 });
 }
});`
- C. `$.ajax({
 type: "GET",
 url: serviceURL,
 success: function(xml) {
 $(xml).find("user").each(function() {
 var id = $(this).attr("id");
 var tx = $(this).find("name").text();
 $("<option>").attr("value", id)
 .text(tx).appendTo("#dropdown");
 });
 }
});`
- D. `$.ajax({
 type: "GET",
 url: serviceURL,
 success: function(xml) {
 xml.find("user").each(function(node) {
 var id = $(node).attr("id");
 var tx = $(node).find("name").text();
 $("<option>").attr("value", id)
 .text(tx).appendTo("#dropdown");
 });
 }
});`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 75

You are creating an ASP.NET Web site. The site contains pages that are available to anonymous users. The site also contains a page named Premium.aspx that provides premium content to only members of a group named Subscribers.

You need to modify the web.config file to ensure that Premium.aspx can be accessed by only members of the Subscribers group.

Which configuration should you use?

- A. `<location path="Premium.aspx">
<system.web>
<authorization>
<allow users="Subscribers"/>
<deny users="*/>
</authorization>
</system.web>
</location>`
- B. `<location path="Premium.aspx">
<system.web>
<authorization>
<allow roles="Subscribers"/>
<deny users="*/>
</authorization>
</system.web>
</location>`
- C. `<location path="Premium.aspx">
<system.web>
<authorization>
<allow roles="Subscribers"/>
<deny users="?"/>
</authorization>
</system.web>
</location>`
- D. `<location path="Premium.aspx">
<system.web>
<authorization>
<deny users="*/>
<allow roles="Subscribers"/>
</authorization>
</system.web>
</location>`

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 76

You are creating an ASP.NET Web application that uses the SqlMembershipProvider. You plan to test locally and deploy to multiple production servers. You need to ensure that each deployed application accesses the same production database in Microsoft SQL Server.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Run the `aspnet_regsql` command to create the database on the appropriate SQL Server computer.
- B. Right-click `App_Data` in your Visual Studio 2010 project, click `Add`, and select `New Item` to create the SQL Server database on the appropriate SQL Server computer.
- C. Modify the connection string in the `web.config` file to specify the names of the production server and database.
- D. Modify the `web.release.config` file to transform the connection string to specify the names of the production server and database.

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 77

You are implementing an ASP.NET Web application. Users will authenticate to the application with an ID. The application will allow new users to register for an account. The application will generate an ID for the user based on the user's full name. You need to implement this registration functionality. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Configure the SqlMembershipProvider in the web.config file.
- B. Configure the SqlProfileProvider in the web.config file. (New answer from TestKiller, SqlMembershipProvider is not changed)
- C. Create an ASP.NET page that contains a default CreateUserWizard control to create a new user account.
- D. Create an ASP.NET page that contains a custom form that collects the user information and then uses the Membership.CreateUser method to create a new user account.

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 78

You use the ASP.NET Web Application template to create an application in a new Visual Studio solution. The project uses types that are defined in a class library project. Source code for the class library is frequently modified. You need to ensure that classes in the Web application project always reference the most recent version of the class library types. What should you do?

- A. Add the class library project to the solution. Modify the class library project to add a reference to the Web application project.
- B. Add the class library project to the solution. Modify the Web application project to add a reference to the class library project.
- C. Add a post-build step to the Web application project that copies the most recent version of the class library assembly to the bin folder of the Web application.
- D. Add a post-build step to the class library project that copies the most recent version of the class library assembly to the App_Code folder of the Web application. In the <compilation /> section of the web.config file, add an <assembly /> entry that specifies the location of the class library assembly.

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 79

You are developing an ASP.NET application by using Visual Studio 2010. You need to interactively debug the entire application. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Set the Debug attribute of the compilation node of the web.config file to true.
- B. Add a DebuggerDisplay attribute to the code-behind file of the page that you want to debug.
- C. Select the ASP.NET debugger option in the project properties.
- D. Define the DEBUG constant in the project settings.

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 80

You are deploying an ASP.NET Web application to a remote server. You need to choose a deployment method that will ensure that all IIS settings, in addition to the Web content, will deploy to the remote server. Which deployment method should you choose?

- A. the XCOPY command-line tool
- B. the Copy Web Site tool
- C. the Web Deployment tool
- D. the Publish Web Site utility

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 81

You are preparing to deploy an ASP.NET application to a production server by publishing the application in Release configuration. You need to ensure that the connection string value that is stored in the web.config file is updated to the production server's connection string value during publishing. What should you do?

- A. Add the following code to the web.config file.

```
<connectionStrings>  
<add name="DB"  
connectionString="Server=ProdServer;Database=ProdDB;Integrated Security=SSPI;"  
providerName="Release" />  
</connectionStrings>
```
- B. Add the following code to the web.config file.

```
<connectionStrings>  
<add name="DB"  
connectionString="Server=ProdServer;Database=ProdDB;Integrated Security=SSPI;" xdt:  
Transform="Replace" xdt:Locator="Match(name)" />  
</connectionStrings>
```
- C. Add the following code to the web.release.config file.

```
<connectionStrings>  
<add name="DB"  
connectionString="Server=ProdServer;Database=ProdDB;Integrated Security=SSPI;"  
providerName="Release" />  
</connectionStrings>
```

D. Add the following code to the web.release.config file.

```
<connectionStrings>
<add name="DB"
connectionString="Server=ProdServer;Database=ProdDB;Integrated Security=SSPI;" xdt:Transform="
Replace" xdt:Locator="Match(name)" />
</connectionStrings>
```

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 82

You are implementing an ASP.NET application. The application includes a Person class with property Age. You add a page in which you get a list of Person objects and display the objects in a GridView control. You need to add code so that the GridView row is highlighted in red if the age of the person is less than 18. Which GridView event should you handle?

- A. RowDataBound
- B. RowCommand
- C. RowUpdated
- D. RowEditing

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 83

You are implementing an ASP.NET page that will retrieve large sets of data from a data source. You add a ListView control and a DataPager control to the page. You need to ensure that the data can be viewed one page at a time. What should you do?

- A. Set the DataPager control's PageSize property to the number of rows to view at one time.
- B. Set the DataPager control's PagedControlID property to the ID of the ListView control.
- C. In the code-behind file, set the DataPager control's Parent property to the ListView control.
- D. In the code-behind file, set the ListView control's Parent property to the DataPager control.

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 84

You create a page in an ASP.NET Web application. The page retrieves and displays data from a Microsoft SQL Server database. You need to create a data source that can connect to the database. What are two possible ways to achieve this goal? (Each correct answer presents a complete solution. Choose two.)

- A. Use an ObjectDataSource control and set its TypeName property to System.Data.SqlClient.SqlConnection.
- B. Use a SqlDataSource control and configure itsConnectionString in the web.config file.
- C. Use an XmlDataSource control together with an Xml control that represents the database.
- D. Use a LinqDataSource control with entity classes that represent the elements in the database.

Answer: BD

Section: (none)

Explanation/Reference:

QUESTION 85

You are developing an ASP.NET Web application. You create a master page. The master page requires a region where you can add page-specific content by using the ASP.NET page designer. You need to add a control to the master page to define the region. Which control should you add?

- A. Placeholder
- B. ContentPlaceholder
- C. Content
- D. Substitution

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 86

You are developing an ASP.NET Web page. You add the following markup to the page.

```
<asp:FileUpload id="FileUpload1" runat="server" />
<asp:Button id="btnUpload" Text="Upload selected file"
OnClick="btnUpload_Click" runat="server" />
<asp:Label id="lblFeedback" runat="server" />
```

You add the following code segment to the code-behind. (Line numbers are included for reference only.)

```
01 protected void btnUpload_Click(object sender, EventArgs e)
02 {
03     if (...)
04     {
05         string saveName = Path.Combine(@"c:\uploadedfiles\", FileUpload1.FileName);
06
07         lblFeedback.Text = "File successfully uploaded.";
08     }
09     else
10     {
11         lblFeedback.Text = "File upload failed.";
12     }
13 }
```

You need to save the uploaded file and display a message to the user that indicates that the upload either

succeeded or failed. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Replace line 3 with the following code segment.
If (FileUpload1.HasFile)
- B. Replace line 3 with the following code segment.
If (FileUpload1.FileContent.Length > 0)
- C. Insert the following code segment at line 6.
FileUpload1.SaveAs(saveName)
- D. Insert the following code segment at line 6.
FileUpload1.FileContent.CopyTo(new FileStream(saveName, FileMode.Open))

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 87

You are developing an ASP.NET MVC 2 Web application. The application contains a controller named HomeController, which has an action named Index. The application also contains a separate area named Blog

. A view within the Blog area must contain an ActionLink that will link to the Index action of the HomeController. You need to ensure that the ActionLink in the Blog area links to the Index action of the HomeController. Which ActionLink should you use?

- A. `Html.ActionLink("Home", "Index", "Home")`
- B. `Html.ActionLink("Home", "Index", "Home", new {area = ""}, null)`
- C. `Html.ActionLink("Home", "Index", "Home", new {area = "Blog"}, null)`
- D. `Html.ActionLink("Home", "Index", "Home", new {area = "Home"}, null)`

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 88

You are developing an ASP.NET MVC 2 application. A view contains a form that allows users to submit their first name. You need to display the value that is submitted, and you must ensure that your code avoids cross-site scripting. Which code segment should you use?

- A. `<%: Model.FirstName %>`
- B. `<%= Model.FirstName %>`
- C. `<% Response.Write(Model.FirstName) %>`
- D. `<% Response.Write(HttpUtility.HtmlDecode(Model.FirstName)) %>`

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 89

You are developing an ASP.NET Web page that will display the median value from a sequence of integer values. You need to create an extension method to compute the median value. Which interface should you add the extension method to?

- A. IComparer<T>
- B. IEnumerable<T>
- C. IEnumerator<T>
- D. IEqualityComparer<T>

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 90

You are creating an ASP.NET Web application. The application must call a WCF service by using a WCF routing service. You need to ensure that the application can invoke the target service by using the router endpoint. What should you do?

- A. Add a service reference to the router service. In the client binding configuration, specify the address of the router service.
- B. Add a service reference to the target service. In the client binding configuration, specify the address of the target service.
- C. Add a service reference to the router service. In the client binding configuration, specify the address of the target service.
- D. Add a service reference to the target service. In the client binding configuration, specify the address of the router service.

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 91

You are developing an ASP.NET Web page. You add a data-bound GridView control. The GridView contains a TemplateField that includes a DropDownList. You set the GridView's ClientIDMode property to Static, and you set the ClientIDRowSuffix property to ProductID. You need to be able to reference individual DropDownList controls from client-side script by using the ProductID. What should you set the ClientIDMode property of the DropDownList to?

- A. AutoID
- B. Static
- C. Inherit
- D. Predictable

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 92

GridView: How to change the image of an image control place in each row in a gridview:

- A. ItemDataBound
- B. Init
- C. Prerender
- D. <something I don't remember>

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 93

You are developing an ASP.NET Web page. The page includes a List<Product> instance. You add a FormView control to display a single Product from this list. You need to bind the list to the FormView control. Which FormView property should you set in the code-behind file?

- A. DataSource
- B. DataSourceID
- C. DataKeyNames
- D. DataMember

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 94

You are implementing an ASP.NET Web site that uses a custom server control named Task. Task is defined as shown in the following list.

Class name: Task
Namespace: DevControls
Assembly: TestServerControl.dll
Base class: System.Web.UI.WebControls.WebControl

You copy TestServerControl.dll to the Web site's Bin folder.

You need to allow the Task control to be declaratively used on site pages that do not contain an explicit @Register directive.

Which configuration should you add to the web.config file?

- A. <appSettings>
 <add key="Dev:Task"
 value="DevControls, DevControls.Task"/>
 </appSettings>

- B. `<compilation targetFramework="4.0" explicit="false">`
 `<assemblies>`
 `<add assembly="TestServerControl" />`
 `</assemblies>`
 `</compilation>`
- C. `<pages>`
 `<controls>`
 `<add assembly="TestServerControl" namespace="DevControls"`
 `tagPrefix="Dev"/>`
 `</controls>`
 `</pages>`
- D. `<pages>`
 `<tagMapping>`
 `<add tagType="System.Web.UI.WebControls.WebControl"`
 `mappedTagType="DevControls.Task"/>`
 `</tagMapping>`
 `</pages>`

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 95

You are developing an ASP.NET Web application.

The application will contain a page that is customized for various browsers. The application will use output ca

You need to ensure that the page is cached by browser type and major version only.

Which attribute should you add to the **OutputCache** directive?

- A. `VaryByCustom="browser"`
- B. `VaryByCustom="User-Agent"`
- C. `VaryByHeader="browser"`
- D. `VaryByHeader="User-Agent"`

Answer: A

Section: (none)

Explanation/Reference:

QUESTION 96

You are developing an ASP.NET Web page named `WebPage.aspx`.

The page includes a user control named `UserInfoControl.ascx`.

You need to expose a control property named `FirstName` and read its value from the page.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Add the following code segment to `UserInfoControl.ascx.cs`.
`protected string FirstName { get; set; }`
- B. Add the following code segment to `UserInfoControl.ascx.cs`.
`public string FirstName { get; set; }`
- C. Add the following code segment to `WebPage.aspx.cs`.
`var firstName = UserInfoControl1.Attributes["FirstName"];`
- D. Add the following code segment to `WebPage.aspx.cs`.
`var firstName = UserInfoControl1.FirstName;`

Answer: BD

Section: (none)

Explanation/Reference:

QUESTION 97

You are developing an ASP.NET Web page. The page contains the following markup.

```
<asp:GridView ID="gvModels" runat="server"
onrowdatabound="gvModels_RowDataBound"
AutoGenerateColumns="false">
<Columns>
<asp:BoundField DataField="Name" HeaderText="Model" />
<asp:TemplateField>
<ItemTemplate>
<asp:Image ID="img" runat="server" />
</ItemTemplate>
</asp:TemplateField>
</Columns>
</asp:GridView>
```

The page's code-behind file includes the following code segment. (Line numbers are included for reference only.)

```
01 protected void gvModels_RowDataBound(object sender,
02 GridViewRowEventArgs e)
03 {
04 if (e.Row.RowType == DataControlRowType.DataRow)
05 {
06 CarModel cm = (CarModel)e.Row.DataItem;
07 img.ImageUrl = String.Format("images/{0}.jpg", cm.ID);
08 }
```

```
09 }  
10 }
```

You need to get a reference to the Image named img. Which code segment should you add at line 06?

- A. Image img = (Image)Page.FindControl("img");
- B. Image img = (Image)e.Row.FindControl("img");
- C. Image img = (Image)gvModels.FindControl("img");
- D. Image img = (Image)Page.Form.FindControl("img");

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 98

You are developing an ASP.NET Web page that includes a text box control.

The page includes a server-side method named **ValidateValue**.

You need to configure the page so that the text box value is validated by using the **ValidateValue** method.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Use the **CompareValidator** control.
- B. Use the **CustomValidator** control.
- C. Set **ValidationGroup** on the control to **ValidateValue**.
- D. Set **OnServerValidate** on the control to **ValidateValue**.

Answer: BD

Section: (none)

Explanation/Reference:

QUESTION 99

You are developing an ASP.NET templated server control.

You need to ensure that a new ID namespace is created within the page control hierarchy when the control is

Which interface should you implement on the control?

- A. **IDataItemContainer**
- B. **INamingContainer**
- C. **IDataKeysControl**
- D. **IExtenderControl**

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 100

You are developing an ASP.NET Dynamic Data Web application.

The application uses entities from a global library named Entities.

The **Application_Start** event contains the following code segment.

```
DefaultModel.RegisterContext(typeof(
    Entities.MyDBDataContext), new ContextConfiguration() {
    ScaffoldAllTables = false });
```

You need to ensure that the application shows the **Order** and **Customer** entities and hides all other entities.

What should you do?

- A. Set the **ScaffoldAllTables** property of the **ContextConfiguration** to true.
- B. Create a partial class for each entity except **Order** and **Customer** within the Entities library and apply the **[ScaffoldIgnore]** attribute.
- C. Create a partial class for the **Order** and **Customer** entities within the Web application and apply the **[ScaffoldIgnore]** attribute.
- D. Create a partial class for the **Order** and **Customer** entities within the Entities library and apply the **[ScaffoldIgnore]** attribute.

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 101

You are developing an ASP.NET Web page.

The page includes the following **EntityDataSource** control.

```
<asp:EntityDataSource ID="EntityDataSource1" runat="server"
    ConnectionString="name=AdventureWorksEntities"
    DefaultContainerName="AdventureWorksEntities" EnableFlattening="False"
    EntitySetName="Products" />
```

The page must filter the data that is displayed in a grid based on a query string parameter named **ProductPrefix** whose **ProductName** starts with the query string value.

You need to ensure that the page generates the appropriate database query.

What should you do?

- A. Add the following element to the **EntityDataSource** control.

```
<WhereParameters>
    <asp:DynamicQueryStringParameter
        QueryStringField="ProductPrefix" Name="ProductName" />
</WhereParameters>
```

- B. Add the following element to the **EntityDataSource** control.

```
<WhereParameters>
    <asp:QueryStringParameter
        QueryStringField="ProductPrefix" Name="ProductName" />
</WhereParameters>
```

- C. Add the following control after the **EntityDataSource** control.

```
<asp:QueryExtender ID="QueryExtender1" runat="server"
    TargetControlID="EntityDataSource1">
    <asp:PropertyExpression Name="ProductName" />
    <asp:DynamicFilterExpression ControlID="ProductPrefix" />
</asp:QueryExtender>
```

- D. Add the following control after the **EntityDataSource** control.

```
<asp:QueryExtender ID="QueryExtender1" runat="server"
    TargetControlID="EntityDataSource1">
    <asp:SearchExpression SearchType="StartsWith"
        DataFields="ProductName">
        <asp:QueryStringParameter
            QueryStringField="ProductPrefix" />
    </asp:SearchExpression>
</asp:QueryExtender>
```

Answer: D


Section: (none)

Explanation/Reference:

QUESTION 102

You are developing an ASP.NET Web application.

The application includes the following Entity Data Model (EDM).

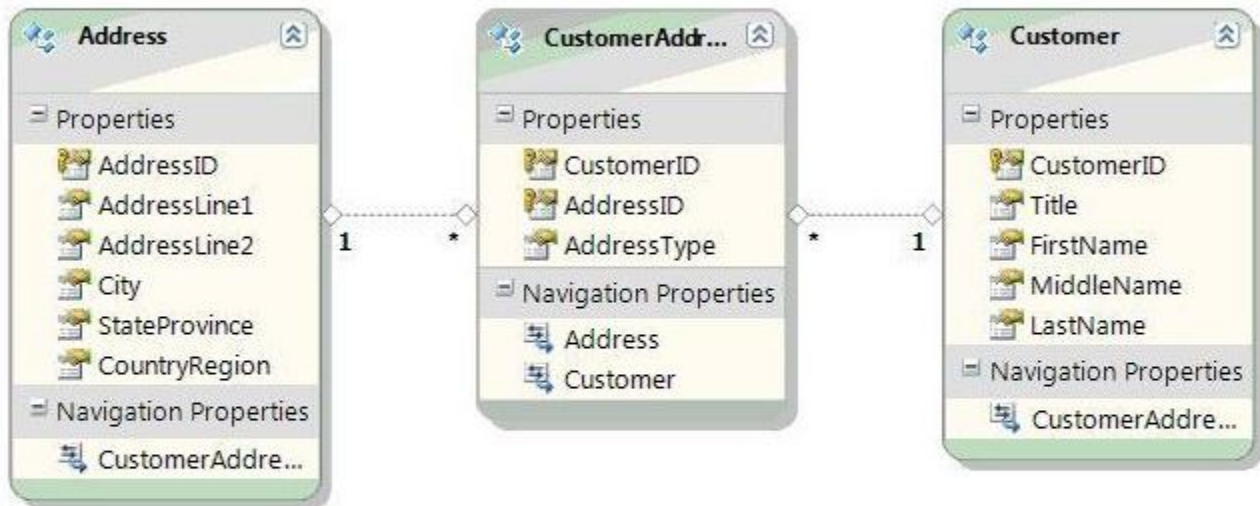

You instantiate an **ObjectContext** for the EDM named **context**.

You need to find the total number of addresses that are associated with customers that have a non-null middle name.

Which LINQ to Entities query should you use?

- A.

```
var query = context.Customers
    .Where(c => c.MiddleName != null)
    .Select(c => c.CustomerAddresses).Count();
```
- B.

```
var query = context.Customers
    .Where(c => c.MiddleName != null)
    .SelectMany(c => c.CustomerAddresses).Count();
```
- C.

```
var query = context.Addresses
    .SelectMany(a => a.CustomerAddresses.OfType<Customer>())
    .Where(c => c.MiddleName != null).Count();
```
- D.

```
var query = context.Addresses
    .GroupBy(a => a.CustomerAddresses
    .Where(ca => ca.Customer.MiddleName != null)).Count();
```

Answer: D

Section: (none)

Explanation/Reference:

QUESTION 103

You are debugging an ASP.NET Web page.

The page includes the following method.

```
[WebMethod]
public string GetServerString()
{
    ...
}
```

The page also includes the following markup.

```
<asp:ScriptManager ID="sm1" runat="server" />
```

The following JavaScript code is used to call the **GetServerString** method.

```
function GetString() {
    PageMethods.GetServerString(callbackMethod);
}

function callbackMethod(str) {
    ...
}
```

The AJAX calls to the **GetServerString** method are failing.

You need to ensure that the AJAX call to the **GetServerString** method succeeds.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Set the **EnablePageMethods** property of the **ScriptManager** control to **true**.
- B. Set the **EnablePartialRendering** property of the **ScriptManager** control to **true**.
- C. Change the **WebMethod** attribute of the **GetServerString** method to **WebMethod(EnableSession=true)**.
- D. Declare the **GetServerString** method as static.

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 104

You are developing an ASP.NET Web page.

The page includes a **DropDownList** control.

You need to call a client-side function when the user changes the value of the control.

Which event should you handle?

- A. **Click**
- B. **SelectedIndexChanged**
- C. **Change**
- D. **Select**

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 105

You are developing an ASP.NET Web application that you will deploy to an Internet Information Services (IIS) in Integrated pipeline mode.

The application contains a photo gallery of images that are stored in a Microsoft SQL Server database.

You need to ensure that the application can retrieve images from the database without blocking IIS worker pr

What should you do?

- A. Create a synchronous **HttpHandler** that is registered in the <httpHandlers> section in the web.config file.
- B. Create an asynchronous **HttpHandler** that is registered in the <handlers> section under *system.webServices*.
- C. Create a custom **HttpModule** that is registered in the <httpModules> section in the web.config file.
- D. Create an asynchronous **HttpHandler** that is registered in the <httpHandlers> section in the web.config

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 106

You are adding new capabilities to an ASP.NET Web site. The site currently connects to a Microsoft SQL Server of the CONTOSO\AppIdentity account, which has been granted access to only objects within the database.

The application requires the following implementation.

- Database objects that support ASP.NET roles must be added to the existing database.
- The CONTOSO\AppIdentity user must be granted only the minimum privileges that are required to support the application.

You need to add the ASP.NET roles support.

Which two actions should you perform? (Each correct answer presents part of the complete solution. Choose two.)

- A. Use the aspnet_regsql tool.
- B. Use the aspnet_regiis tool.
- C. Add the CONTOSO\AppIdentity user to the aspnet_Roles_FullAccess database role.
- D. Add the CONTOSO\AppIdentity user to the db_accessadmin database role.

Answer: AC

Section: (none)

Explanation/Reference:

QUESTION 107

You are developing an ASP.NET MVC 2 Web application. A page makes an AJAX request and expects a list of company names in the following format. ["Adventure Works","Contoso"] You need to write an action method that returns the response in the correct format. Which type should you return from the action method?

- A. AjaxHelper
- B. XDocument
- C. JsonResult
- D. DataContractJsonSerializer

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 108

You are developing an ASP.NET Dynamic Data Web application. Boolean fields must display as Yes or No instead of as a check box. You replace the markup in the default Boolean field template with the following markup.

```
<asp:Label runat="server" ID="label" />
```

You need to implement the code that displays Yes or No.

Which method of the FieldTemplateUserControl class should you override in the BooleanField class?

- A. OnLoad

- B. Construct
- C. OnDataBinding
- D. SaveControlState

Answer: C

Section: (none)

Explanation/Reference:

QUESTION 109

You are developing an ASP.NET Web service. The following code segment implements the service. (Line numbers are included for reference only.)

```
01 [WebServiceBinding(ConformsTo = WsiProfiles.BasicProfile1_1)]
02 public class ProductService :
03     System.Web.Services.WebService
04 {
05     [WebMethod]
06     public Product GetProduct(string name)
07     {
08     }
09 }
10 [WebMethod]
11 public Product GetProduct(int id)
12 {
13 }
14 }
15 }
```

You need to ensure that both GetProduct methods can be called from a Web client. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A. Remove line 01.
- B. Add the static modifier on lines 05 and 11.
- C. Add the following attribute before line 10. [SoapDocumentMethod(Action="GetProductById")]
- D. Modify the attribute on line 10 as follows. [WebMethod(MessageName="GetProductById")]

Answer: AD

Section: (none)

Explanation/Reference:

QUESTION 110

You are developing an ASP.NET Web application. Application data is stored in a Microsoft SQL Server 2008 database. You configure a connection string named cnnContoso. The application must cache the data that is returned from the database by using this connection string. You need to ensure that the application checks the database every 10 seconds. What should you do?

- A. Add the following configuration to the <system.web> section of the web.config file.
- ```
<aching>
<outputCacheSettings>
<outputCacheProfiles>
<add name="cnnContoso"
duration="10" />
</outputCacheProfiles>
</outputCacheSettings>
</aching>
```
- B. Add the following configuration to the <system.web> section of the web.config file.
- ```
<aching>
<sqlCacheDependency enabled="true" pollTime="10000">
<databases>
<add name="ContosoDatabase"
connectionStringName="cnnContoso" />
</databases>
</sqlCacheDependency>
</aching>
```
- C. Add the following @ Page directive to pages that query the database.
- ```
<%@ OutputCache Duration="10"
VaryByParam="cnnContoso" %>
```
- D. Add the following @ Page directive to pages that query the database.
- ```
<%@ OutputCache Duration="10000"
VaryByParam="cnnContoso" %>
```

Answer: B

Section: (none)

Explanation/Reference:

QUESTION 111

You are developing an ASP.NET Web page that contains input controls, validation controls, and a button named btnSubmit. The page has the following code-behind. (Line numbers are included for reference only.)

```
01 public partial class _Default : System.Web.UI.Page
02 {
03     protected void SaveToDatabase()
04     {
05
06     }
07
08     protected void btnSubmit_Click(object sender, EventArgs e)
09     {
10
11     }
12 }
```

You need to ensure that all data that is submitted passes validation before the data is saved in a database. What should you do?

- A. Add the following method override.
protected override void OnInit(EventArgs e)
{
base.OnInit(e);
if (Page.IsValid) this.SaveToDatabase();
}
- B. Add the following method override.
protected override void OnLoad(EventArgs e)
{
base.OnLoad(e);
if (Page.IsValid) this.SaveToDatabase();
}
- C. Add the following method override.
protected override void OnPreRender(EventArgs e)
{
base.OnPreRender(e);
if (Page.IsValid) this.SaveToDatabase();
}
- D. Add the following code segment at line 10.
if (Page.IsValid) this.SaveToDatabase();

Answer: D

Section: (none)

Explanation/Reference: